

Biomedical data and signal processing

Geometric concepts
and tensor decompositions
For multiway data and signals

IEEE CAS Workshops Brazil

August 2008


Joos Vandewalle

K.U.Leuven, Belgium


Two motivations:

1. Processing of Vectors, Matrices, and Tensors for multiway data and signals
 - Biomedical signals and data sets need advanced processing

System Identification and Control

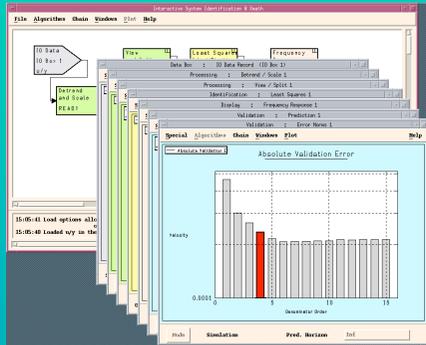


Subspace identification

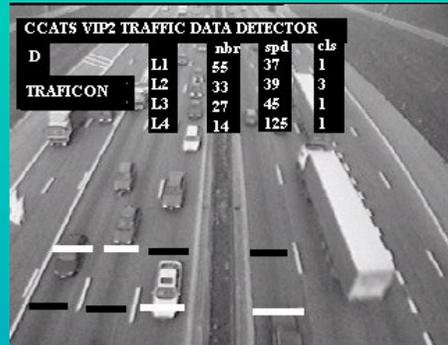

Traffic modelling and control



Satellite control

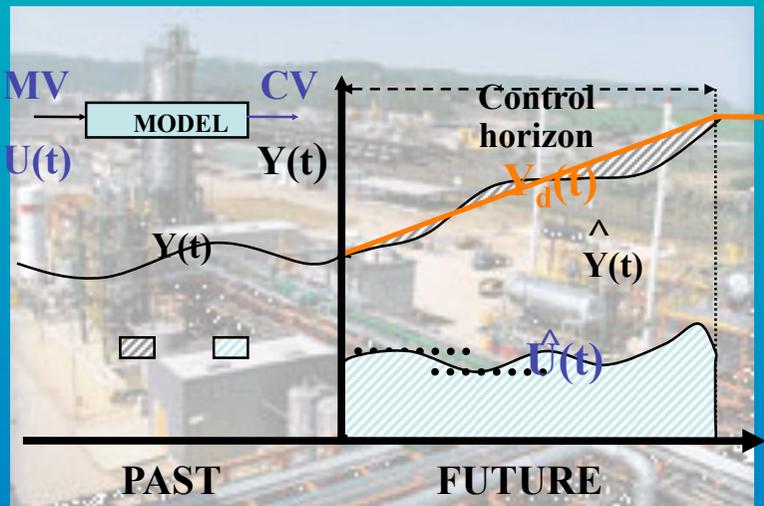

Model Predictive Control



Identification and prediction of time series (stock exchange, physical phenomena, ...)

Data Processing and Data Mining


- Fraud Detection





Credit cards



Mobile telephony


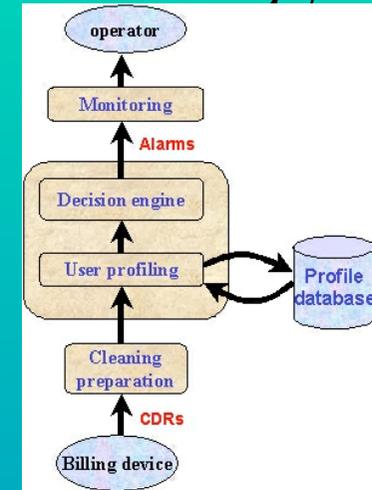


- Bio Informatics

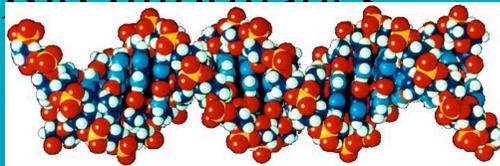


Micro Arrays

- Genetic Sequence Modelling
- Sports and Technology

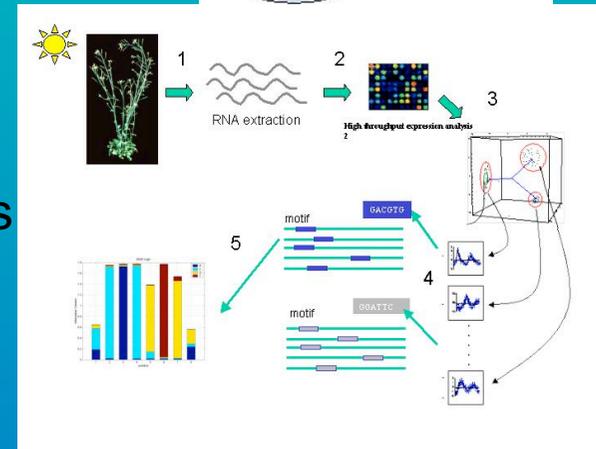


Biomedical Signal Processing


- To improve algorithms for medical diagnostics (accuracy, efficiency, automation)

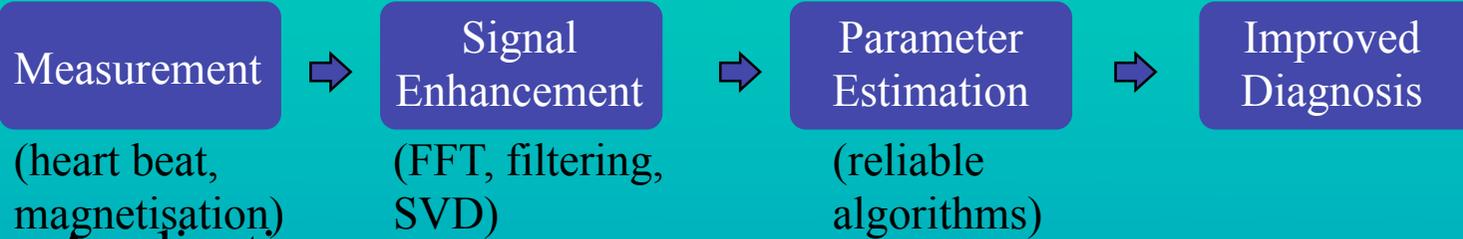


- Applications:

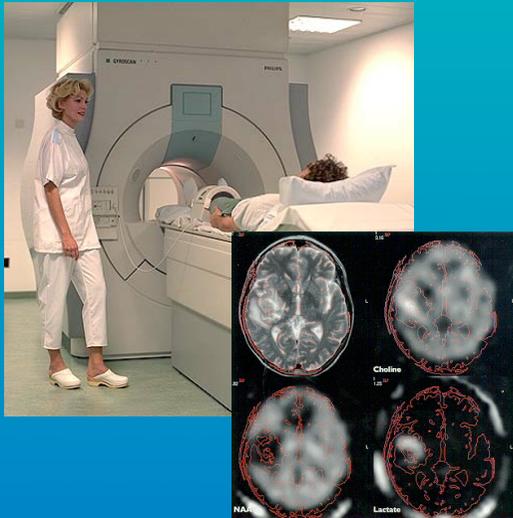

Nuclear Magnetic Resonance

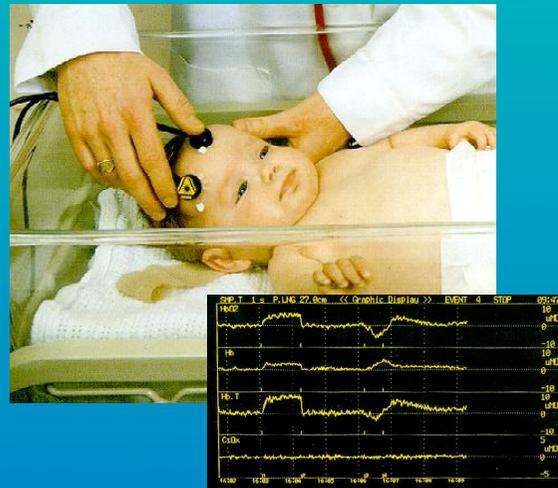

Near Infra-Red Spectroscopy

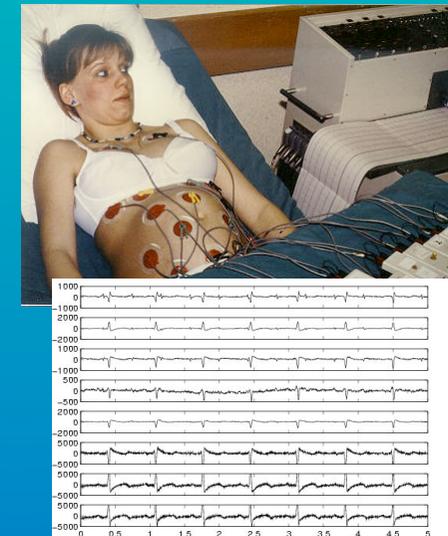


Foetal ECG

ESAT-SISTA

Info: +32-(0)16-321709 or <http://>

Signal processing, signal separation & filtering

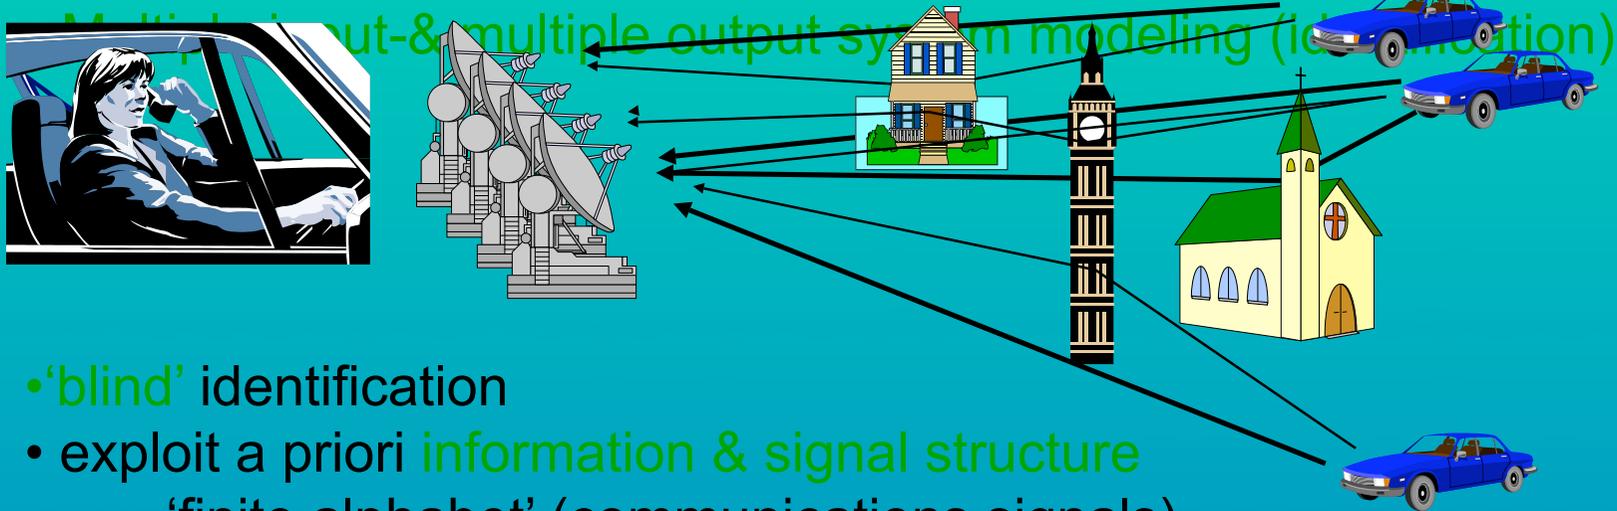


- 'blind' identification
 - exploit a priori information & signal structure
 - 'finite alphabet' (communications signals)
 - ON/OFF (speech signals)
 - known signal components (biomedical signals)
 - performance versus implementation complexity trade-off
- Aim:** Improved high-performance (next generation)
signal separation and filtering techniques

Application :

Multiple signal sources

extract the fetal electrocardiogram (FECG) from multilead potential recordings on the mother's skin

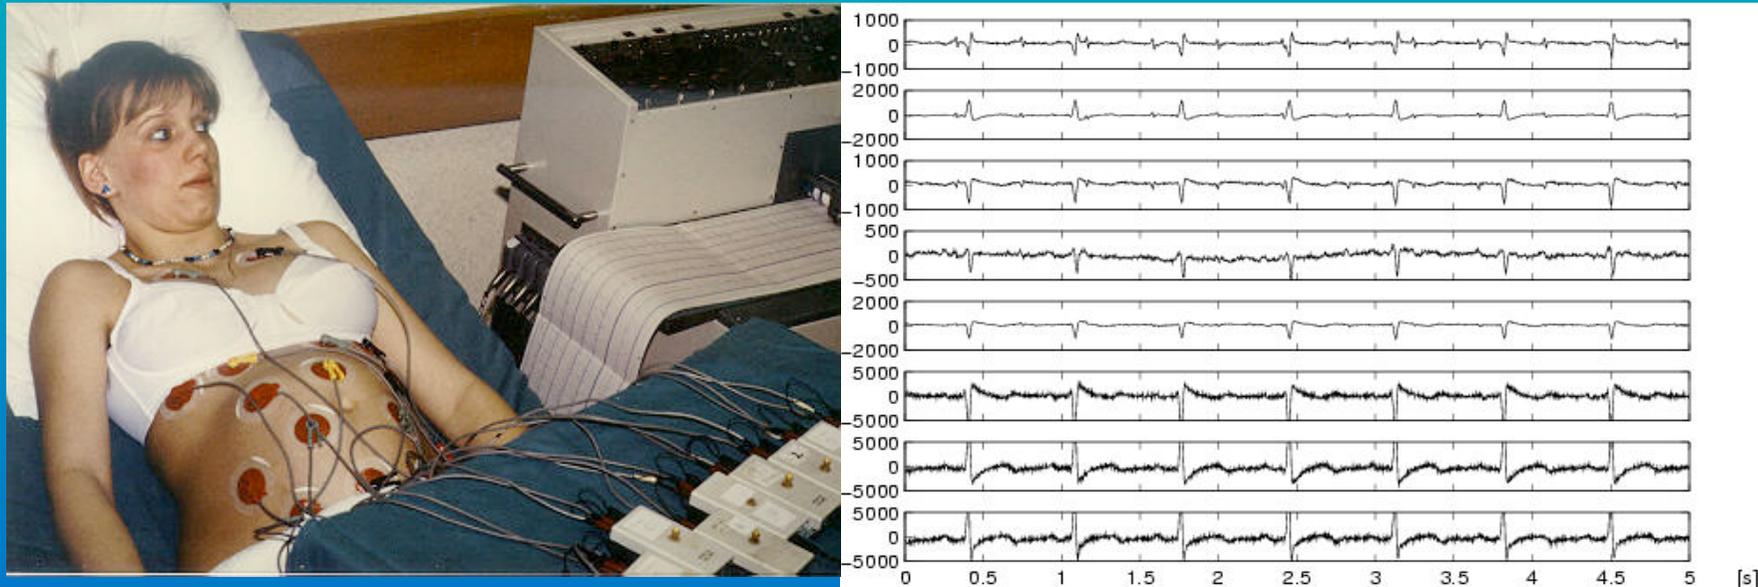


Multiple signals in **matrix** form

measurements

Electrode 1

Electrode 2

Electrode 6

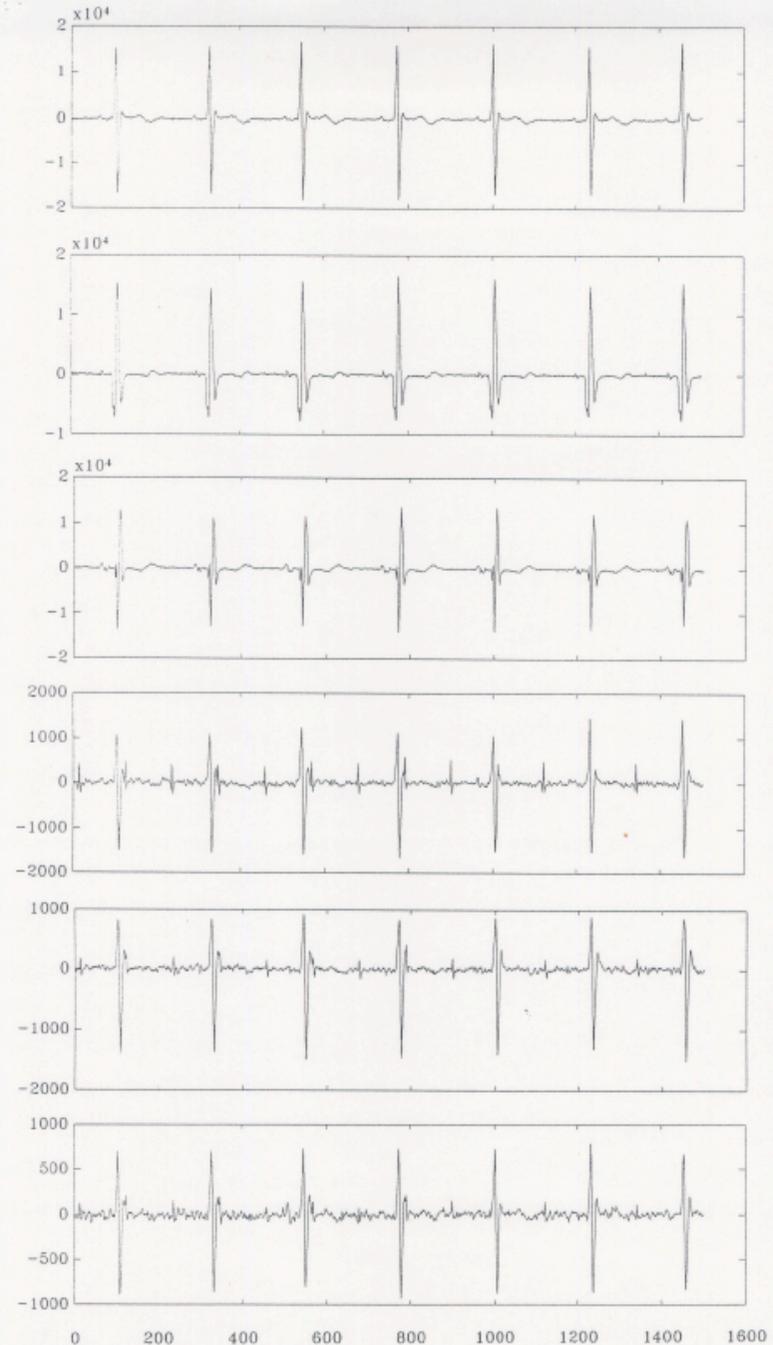

Oriented energy : make linear combination e of signals A

$$E_e(\mathbf{A}) = \sum_{i=1}^n (e^T a_i)^2 = \left\| e^T \mathbf{A} \right\|^2$$

Plot the value of the oriented energy
in the sensing
direction e

Figure with lobes in space

Not the map of the unit ball by \mathbf{A}

Singular Value Decomposition SVD of an $m \times n$ measurement Matrix M

Σ is diagonal and U and V orthogonal

$$M = U \Sigma V^T$$

Optimal sensing direction(s) \mathbf{e}

Spaces of **optimal oriented energy** can be computed with the singular value decomposition **SVD** $\mathbf{A} = \mathbf{U}\mathbf{\Sigma}\mathbf{V}^T$


Left columns of \mathbf{U} largest contributions : most valuable linear combination --> signal component

k-dimensional dominant subspace is spanned by the k left columns of \mathbf{U} ---> orthogonal

Processed
measurements:
using U of SVD of
data matrix.
strongest directions in 6
dimensional
space are detected
Interpretation :
3 dominant signals
=Mother ECG
2 next =FECCG



Further
electrode
measurements
with mixture of
MECG and
FECEG
not suitable for
gynecologist

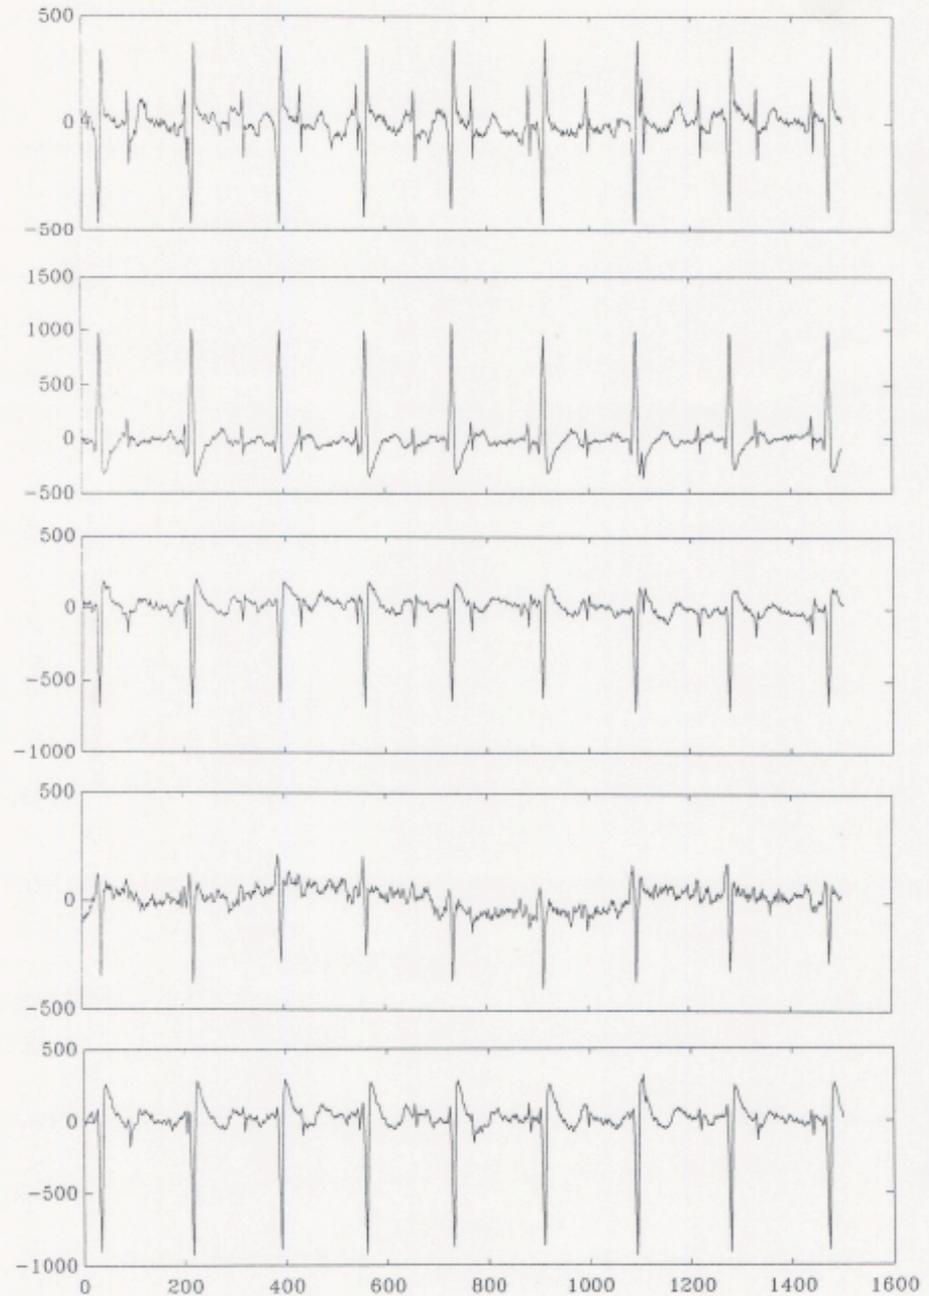


Oriented energy : make linear combination e of signals A

$$E_e(\mathbf{A}) = \sum_{i=1}^n (e^T a_i)^2 = \left\| e^T \mathbf{A} \right\|^2$$

Oriented signal to signal ratio : make linear combination e of “good” signals A versus that of “bad” signals B

$$E_e(\mathbf{A}) / E_e(\mathbf{B}) = \sum_{i=1}^n (e^T a_i)^2 / \sum_{i=1}^n (e^T b_i)^2$$

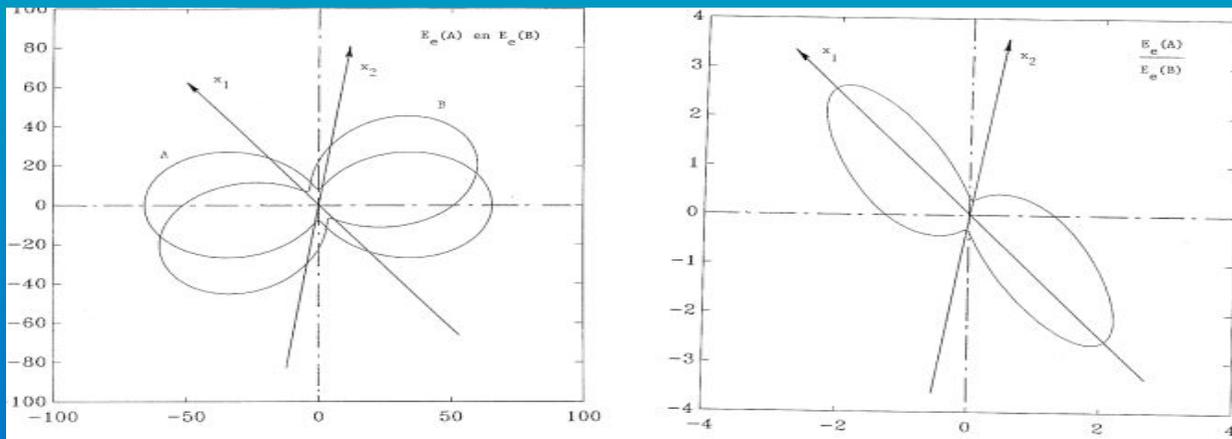


Plot the value
in the sensing
direction e

Oriented energy : make linear combination e of signals A

$$E_e(\mathbf{A}) = \sum_{i=1}^n (e^T a_i)^2 = \left\| e^T \mathbf{A} \right\|^2$$

Oriented signal to signal ratio : make linear combination e of “good” signals A versus that of “bad” signals B

$$E_e(\mathbf{A}) / E_e(\mathbf{B}) = \sum_{i=1}^n (e^T a_i)^2 / \sum_{i=1}^n (e^T b_i)^2$$

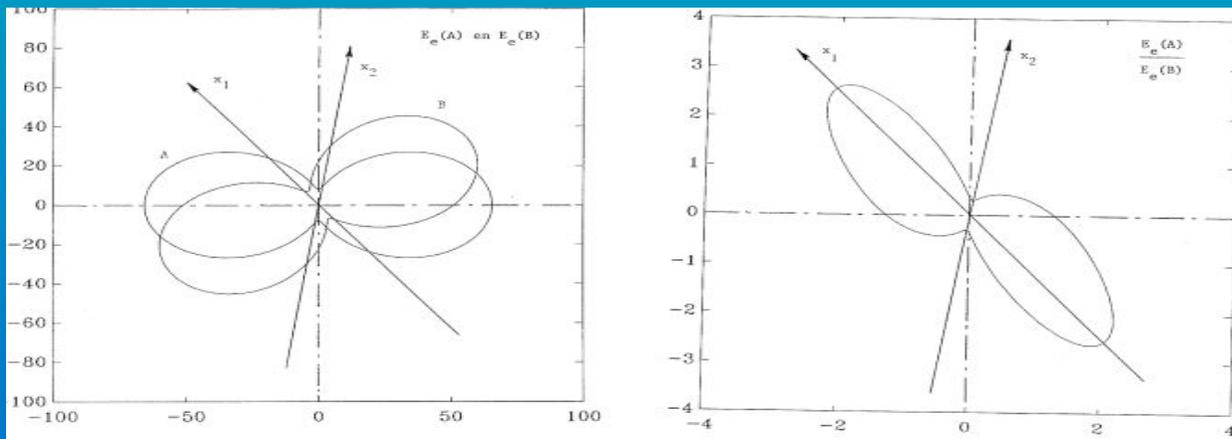

Plot the value
in the sensing
direction e

Optimal sensing direction(s) \mathbf{e}

Spaces of **optimal oriented signal to signal ratio** can be computed with the **generalized svd GSVD** of the $m \times n$ and $m \times l$ matrix pair \mathbf{A}, \mathbf{B}

$$\mathbf{A} = \mathbf{Q}^{-1} \Sigma' \mathbf{V}^T \text{ with } \mathbf{Q} \text{ square nonsingular}$$

$$\mathbf{B} = \mathbf{Q}^{-1} \Sigma'' \mathbf{U}^T \text{ with } \mathbf{U} \text{ and } \mathbf{V} \text{ orthogonal}$$

$$\text{With } \Sigma' = \text{diag}(\sigma_1', \sigma_2', \dots, 0, 0, \dots) \quad \Sigma'' = \text{diag}(\sigma_1'', \sigma_2'', \dots, 0, 0, \dots)$$

$$\text{And } (\sigma_1' / \sigma_1'') \geq (\sigma_2' / \sigma_2'') \geq \dots > 0$$

k -dimensional dominant subspace is spanned by the k left columns of \mathbf{Q} ---> not orthogonal

Application of GSVD :

Measured $m \times n$ matrix of data : row i electrode signal i
Column j time instant j


$m \times n'$ matrix **A** submatrix of columns corresponding to intervals where the desired signal is present

$m \times n''$ matrix **B** submatrix of columns corresponding to intervals where the desired signal is present

Perform GSVD of pair **A B**

First three columns $x_1 x_2 x_3$ of **Q** consistute a basis for the space of fetal heart--> project onto these columns

Processed signals
with GSVD by
projecting the measured
data signals onto
Directions x_1 and x_2 of
maximal oriented
FECG signal versus
MECG signal
--> reveals the relevant
information for the
gynecologist heart rate
and shape of FECG

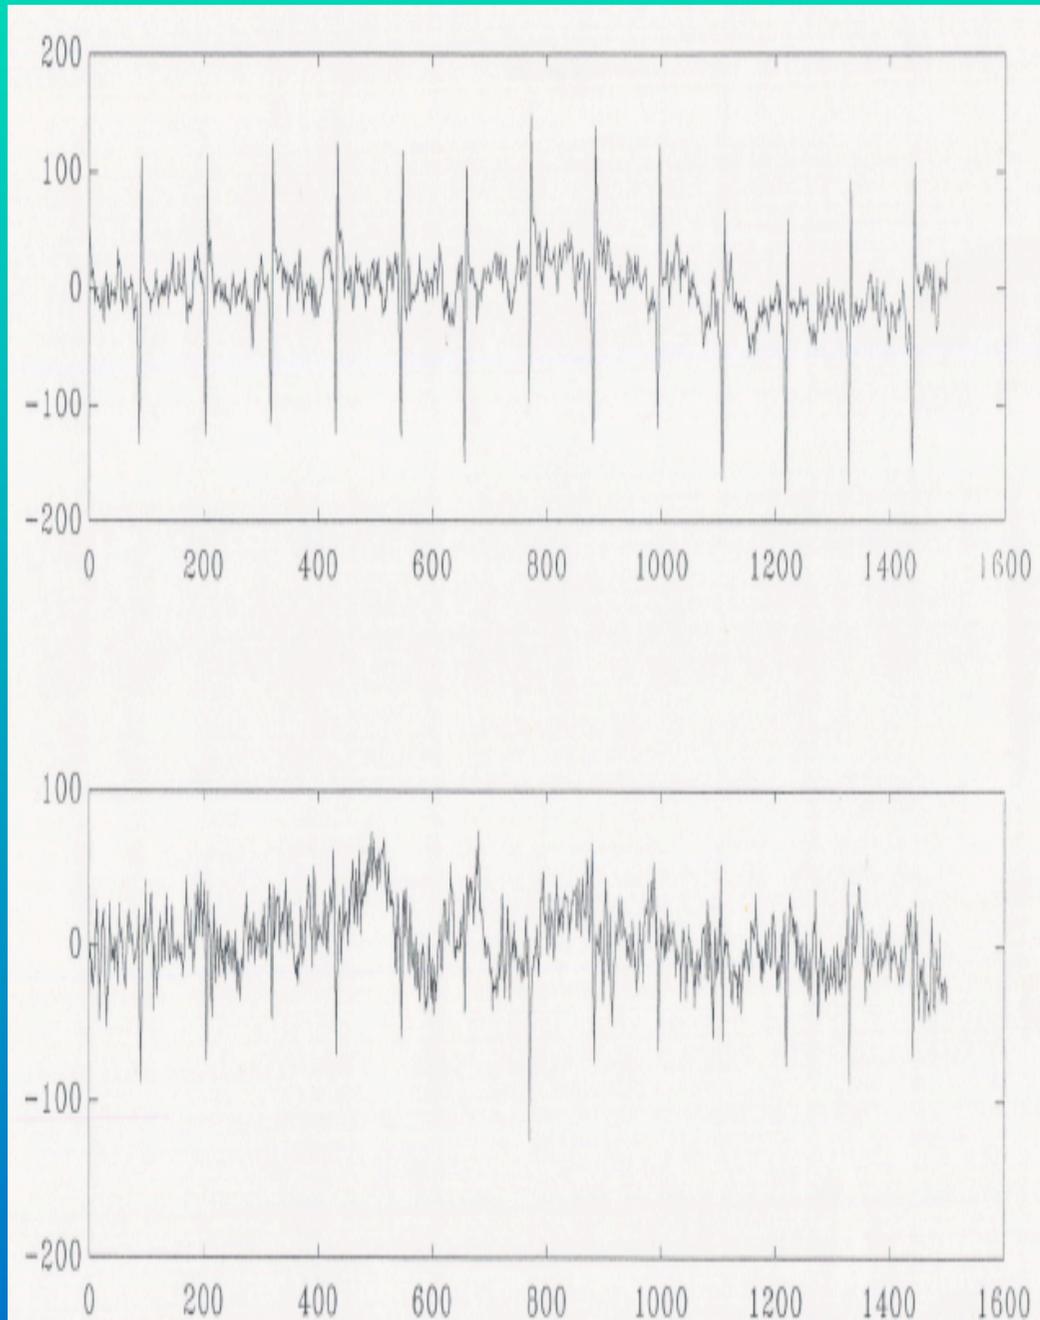

What are multiway data and signals ?

Many signals and data sets have several types of variables involved space, time, frequency,

Time intervals, space intervals or frequency intervals of interest


Black and white image sequences


RGB color images

RGB color image sequences


Microarray image sequences

NMR image spectra



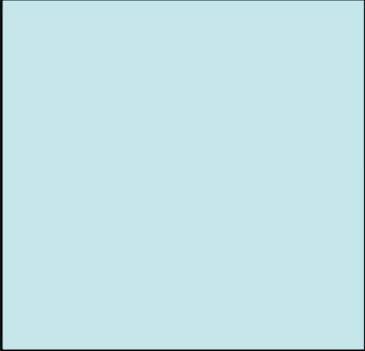

Tensors

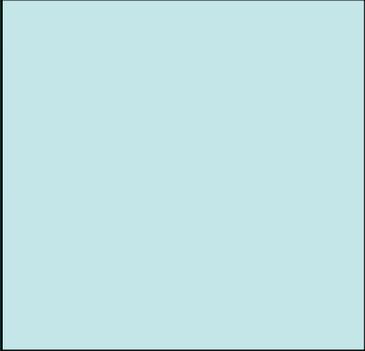

$\mathcal{A}, \mathcal{B}, \mathcal{C}, \mathcal{D} \dots$

3 or more variables : x,y, z space coordinates, time, color...

Tensor algebra, multilinear algebra, ...

Tensor \mathcal{A} of “good” signals and tensor \mathcal{B} of “bad” signals


Higher Order EVD

2nd order : D is diagonal

$$\boxed{S} = \boxed{V} \boxed{D} \boxed{V}$$

3rd order :

D is all-orthogonal and super-symmetric
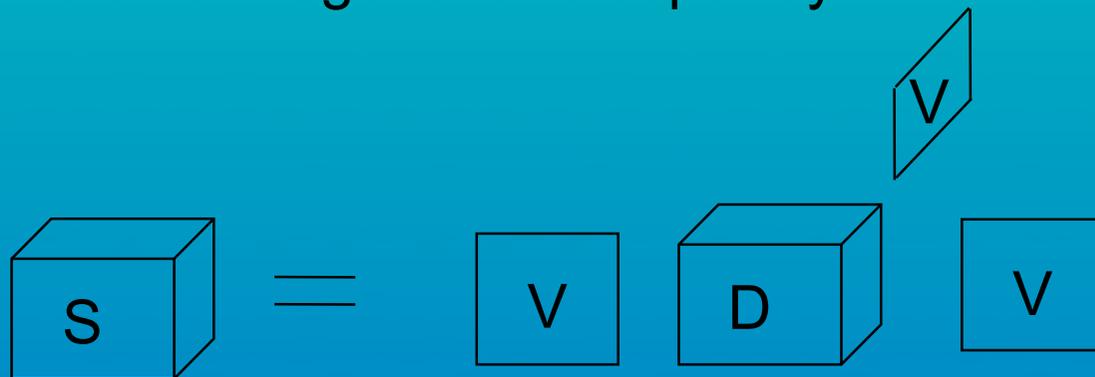
$$\boxed{S} = \boxed{V} \boxed{D} \boxed{V}$$


V is calculated as singular vector matrix of matrix unfolding of 4th order tensor C_4 : improve V by diagonalising D

Can the **notions** be generalized ?
How can the optimal directions be
computed ?

- Need generalization of concepts
- Need generalization of the computations
- **Then test out on applications**

Tensor product

$$\mathcal{A}_{\times_1 \times_2 \dots \times_l} \mathcal{B} = \sum_{i_l=1}^{I_l} \dots \sum_{i_1=1}^{I_1} (a_{i_1 i_2 \dots i_l i_{l+1} \dots i_m} b_{i_1 i_2 \dots i_l i_{l+1} \dots i_n})$$

Can **ONLY** be performed if the size I_j in the direction j of the two tensors is the same for $j=1 \dots l$

Notation at the Level of entries and summations

Frobenius norm of an

m -th order tensor

\mathcal{A}

$$\|\mathcal{A}\|_{\text{F}}^2 = \sum_{i_m=1}^{I_m} \dots \sum_{i_1=1}^{I_1} (a_{i_1 i_2 \dots i_m})^2$$

Oriented energy in sensing direction e

$$E_e(\mathcal{A}) = \sum_{i_2=1}^{I_2} \cdots \sum_{i_n=1}^{I_n} \left(\sum_{i_1=1}^{I_1} (e_{i_1} a_{i_1 i_2 \dots i_n}) \right)^2 = \left\| \mathcal{A} \times_1 e^T \right\|_F^2$$

**Oriented signal to signal ratio
in sensing direction e**

$$\frac{E_e(\mathcal{A})}{E_e(\mathcal{B})} = \frac{\sum_{i_2=1}^{I_2} \cdots \sum_{i_n=1}^{I_n} \left(\sum_{i_1=1}^{I_1} (e_{i_1} a_{i_1 i_2 \dots i_n}) \right)^2}{\sum_{i_2=1}^{I_2} \cdots \sum_{i_m=1}^{I_m} \left(\sum_{i_1=1}^{I_1} (e_{i_1} b_{i_1 i_2 \dots i_m}) \right)^2} = \frac{\left\| \mathcal{A} \times_1 e^T \right\|_F^2}{\left\| \mathcal{B} \times_1 e^T \right\|_F^2} \quad (12)$$

Oriented energy in sensing tensor


\mathcal{E}

$$E_{\mathcal{E}}(\mathcal{A}) = \sum_{i_{l+1}=1}^{I_{l+1}} \cdots \sum_{i_n=1}^{I_n} \left(\sum_{i_l=1}^{I_l} \cdots \sum_{i_1=1}^{I_1} (e_{i_1 \dots i_l} a_{i_1 \dots i_n}) \right)^2 = \left\| \mathcal{A} \times_1 \cdots \times_l \mathcal{E} \right\|_F^2$$

Oriented signal to signal ratio
in sensing tensor


\mathcal{E}

$$\frac{E_{\mathcal{E}}(\mathcal{A})}{E_{\mathcal{E}}(\mathcal{B})} = \frac{\sum_{i_{l+1}=1}^{I_{l+1}} \cdots \sum_{i_n=1}^{I_n} \left(\sum_{i_l=1}^{I_l} \cdots \sum_{i_1=1}^{I_1} (e_{i_1 \dots i_l} a_{i_1 i_2 \dots i_n}) \right)^2}{\sum_{i_{l+1}=1}^{I_{l+1}} \cdots \sum_{i_n=1}^{I_m} \left(\sum_{i_l=1}^{I_l} \cdots \sum_{i_1=1}^{I_1} (e_{i_1 \dots i_l} b_{i_1 i_2 \dots i_m}) \right)^2} = \frac{\left\| \mathcal{A} \times_1 \cdots \times_l \mathcal{E} \right\|_F^2}{\left\| \mathcal{B} \times_1 \cdots \times_l \mathcal{E} \right\|_F^2}$$

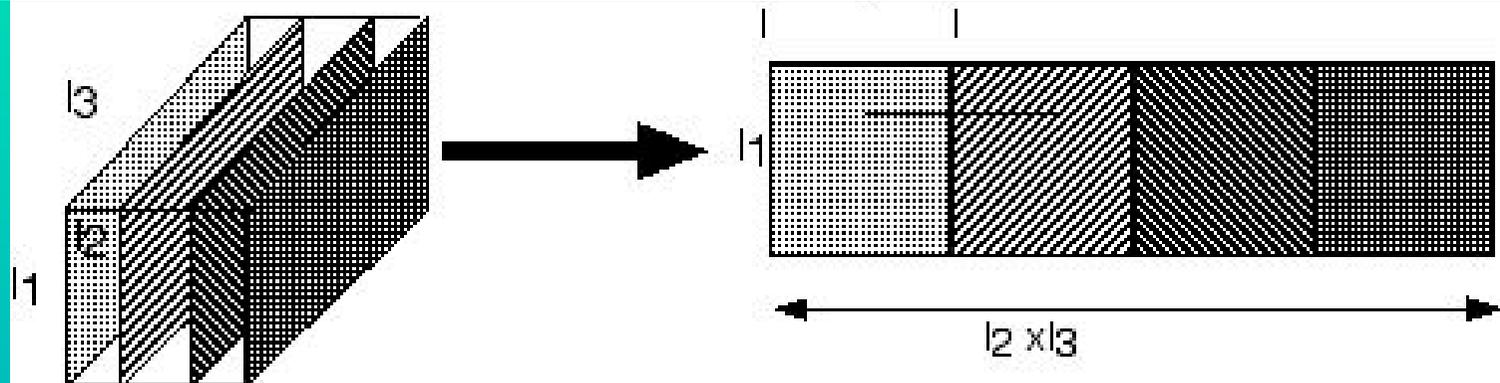


Matrix unfolding of a third order tensor
 Each unfolding has an SVD

matrix unfolding $A(2)$ of the 3rd order tensor \mathcal{A}

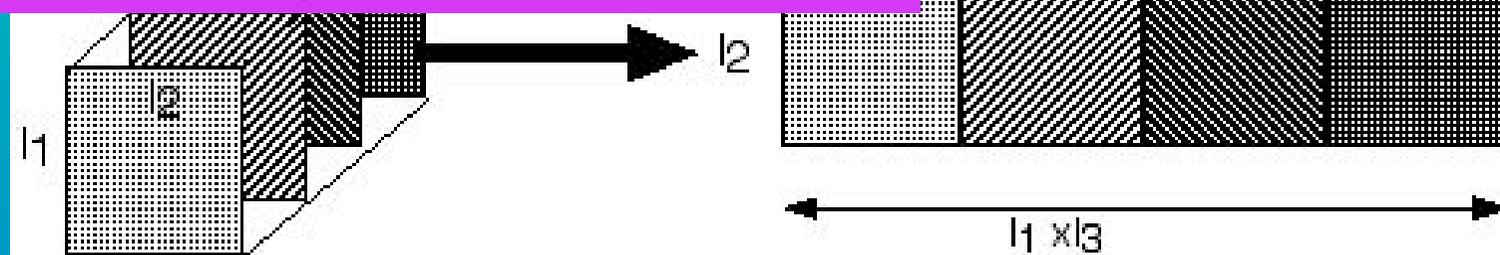

matrix unfolding $A(3)$ of the 3rd order tensor \mathcal{A}

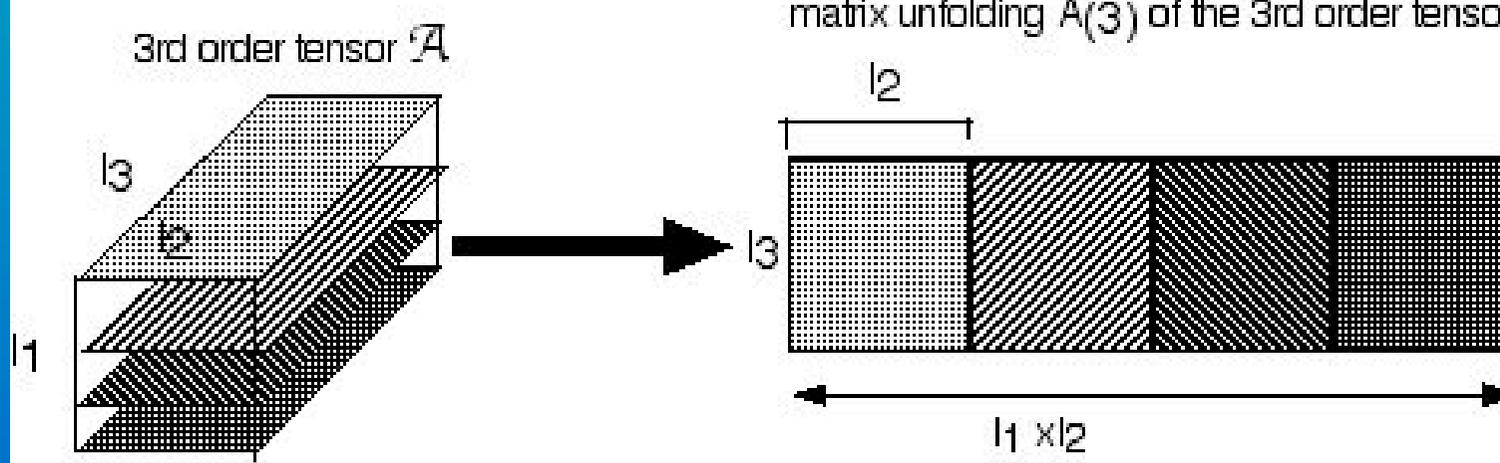

Computation of the oriented energy of an n th order tensor \mathcal{A} in an l -th order sensing tensor \mathcal{E}

- Unfold the tensor in the directions i_1, i_2, \dots, i_l to the left and in the directions i_l, i_{l+1}, \dots, i_n to the right. The result is a matrix \mathbf{A}
- Compute the SVD of $\mathbf{A} = \mathbf{U}\mathbf{\Sigma}\mathbf{V}^T$
- The space of the left k columns of \mathbf{U} has the dominant oriented energy.
- Refold the k columns as **k l -th order dominant tensors $\mathcal{E}_1 \dots \mathcal{E}_k$**

Computation of the oriented signal to signal ratio of a pair of tensors : \mathcal{A} of order n and \mathcal{B} of order m
in an l -th order sensing tensor \mathcal{E}

- Unfold the tensors \mathcal{A} and \mathcal{B} in the directions i_1, i_2, \dots, i_l to the left and in the other directions to the right. The result is a matrix \mathbf{A} and a matrix \mathbf{B}
- Compute the GSVD of the matrix pair $\mathbf{A} \mathbf{B}$
- The space of the left k columns of \mathbf{Q} has the dominant oriented energy.
- Refold the k columns as **k l -th order dominant tensors $\mathcal{E}_1 \dots \mathcal{E}_k$**

Generalized higher order SVD of a tensor pair

$$\mathcal{A} = \mathcal{S} \times_1 \mathbf{W} \times_2 \mathbf{U}^{(2)} \dots \times_N \mathbf{U}^{(N)}$$

$$\mathcal{B} = \mathcal{R} \times_1 \mathbf{W} \times_2 \mathbf{V}^{(2)} \dots \times_M \mathbf{V}^{(M)}$$

	single	pair
matrices	SVD	GSVD
tensors	HOSVD	GHOSVD

Conclusions and suggestions for further work

New concepts defined for multidimensional signals oriented energy and oriented signal to signal ratio of tensors

Can be computed with generalization of higher order SVD HOSVD and the GSVD

If you have a data set where this can be used **try it !!**

Easy to use.

Interesting opportunities for doing a PhD in electrical engineering at K.Universiteit Leuven

Many diverse topics analog, digital, biomedical, electrical energy, cryptography, bioinformatics, systems and control, telecommunications, see web

Currently about 400 PhD students, and about half is foreign

Everything in English, good financing

Good experience with Brazilian PhD students

Samuel De Souza, now postdoc in Belgium

Jorge Nakahara, Unisantos, Brazil until 2007 now

Universidade Presbiteriana Mackenzie, Brasil.

Joining the Leuven Arenberg Doctoral School

<http://set.kuleuven.be/phd/apply.htm>